



TUMIQUI SMART

PRODUCT SPECIFICATIONS



TUMIQUI Smart

※ One solar panel and the main unit are included as a set.



Charging Time		AC Outlet	Solar Panel	Solar Panel	Solar Panel	Car Socket
Device	Capacity	65w	75w	150w	180w	95w
Premium	864	17 h	18 h	9 h	7 h	12 h
Standard	576	11 h	12 h	6 h	5 h	8 h
Eco	336	7 h	7 h	3 h	3 h	5 h

h = hours



Operating Time		Built-in LED	LED Lamp	Smartphone (charges)	TV 32"	Fan	laptop	Inkjet Printer	Laser Printer
Device	Capacity	1.2w	5w	12w	20w	30w	35w	12w	580w
Premium	864	718 h	172 h	72	43 h	29 h	25 h	72 h	1.5 h
Standard	576	497 h	119 h	50	30 h	20 h	17 h	50 h	1 h
Eco	336	282 h	68 h	28	17 h	11 h	10 h	28 h	0.5 h

※ Charging time is approximate and may vary depending on installation conditions.


Total Power Consumption

Device	Capacity	10w	30w	50w	70w	90w	110w	130w	150w
Premium	864	86 h	29 h	17 h	12 h	10 h	8 h	7 h	6 h
Standard	576	60 h	20 h	12 h	9 h	7 h	5 h	5 h	4 h
Eco	336	34 h	11 h	7 h	5 h	4 h	3 h	3 h	2 h

Technical Specifications

Model	HPK-850	HPK-600	HPK-336
Dimensions	365 mm (W) x 143 mm (D) x 319 mm (H)		
Weight	9.5 kg	8.0 kg	13.2 kg
Battery Type	NCM Lithium Battery		Lead Acid Battery
Battery Capacity	864 Wh	576 Wh	336 Wh
Recharge Cycles	Approx. 1500 cycles		Approx. 200 cycles
Built-in LED	Yes (1.2 W)		
AC Output	230V x 2 (Max. Output 800W)	230V x 2 (Max. Output 500W)	230V x 2 (Max. Output 300W)
AC Socket Type	International		
USB Output	USB Type-A x 4 (outside) + USB x 1 (inside)		USB Type-A x 4 (outside)
DC Output	12V (DC Jack 2.5mm) x 4		
Accessories	AC Adapter, Power Cord, Car Charger		
Warranty	1 year from purchase date		

Device Views (Front / Side / Rear)

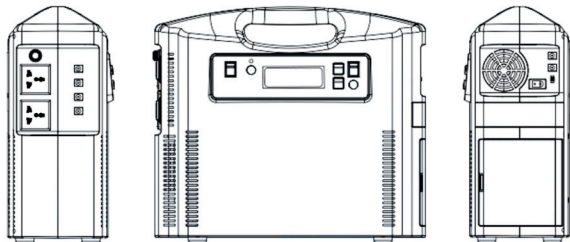

Options

- Inkjet Printer
- Smart TV
- LED Lamp
- Wifi



TUMIQUI Smart+ TV setup example



TUMIQUI Smart + Inkjet Printer setup example



※ For inquiries, please contact: contact@sucrecube.co.jp SUCRECUBE Japon Inc.